# Electrolux Dishwashing

# UK Hood Type WT65E

The Electrolux Dishwashing range is produced for customers with the highest expectations of performance, energy efficiency and ergonomic operation for their dishwashing operation. The product range comprises glasswashers, undercounter dishwashers, hood type dishwashers, rack type dishwashers, flight type dishwashers and pot and pan washers.
The hood type WT65E dishwasher has a capacity of 65 baskets per hour and is suitable for cold or hot water connection.

**EASY TO INSTALL**
- Integral Class 'A' airbreak for direct connection to a mains water supply.
- Rinse booster pump included.
- Drain pump to discharge to pipework above ground level.
- Detergent and rinse aid peristaltic pumps.
- External electrical connecting board, protected by a waterproof plastic box.
- Simple service from the front and from the side panels.
- Pre-arrangement for connection to an energy management device or HACCP system.
- Corner or straight flow installation.
- Extensive Electrolux Handling System range of tabling and roller conveyors to create a functional and ergonomic dishwash lay-out.

**EASY TO CLEAN**
- Smooth surfaces and wash tank with rounded corners.
- Easily removable washing & rinsing arms, filters and rack support.
- Rack support guide pressed in the tank body.
- No pipes inside the washing chamber.
- Self cleaning cycle. Electronic control of the functions incorporating fault diagnosis system, number of cycles counter and number of drain cycles counter.
- Simple control panel with digital thermometers indicating both wash and rinse temperatures.
- Four dishwashing programs: one for glass and lightly soiled items, one for normally soiled items, one for heavily soiled items and the fourth program is continuous.
- Height adjustable rounded feet.
- IPX5 water protection.

**EASY TO USE**
- Fully automatic in operation with a gauranteed wash and rinse performance that is independent of external influences such as low incoming water temperature or pressure.
- Atmospheric boiler combined with the rinse booster pump for perfect rinsing performances in terms of sanitation, energy saving (water temperature always constant during rinsing cycles), independence from the water pressure on the network.
- Easy to opearte hood thanks to a low friction guide system.
- Double skin hood ceiling and completely closed and insulated back for less heat and noise dispersion.
- Pre-arrangement for connection to an Energy Management device.

Electrolux

**Electrolux Dishwashing**
**UK Hood Type WT65E**

## EASY TO MAINTAIN

- Main internal components in 304 AISI stainless steel as well as the external front and side panels.
- Automatic boiler emptying function.
- Washing pump with automatic drain function.
- Fault auto-diagnosis system.
- In compliance with CE requirements.

## EASY ON THE ENVIRONMENT

- Low noise level.
- CFC free packaging.
- 97% recyclable by weight.
- Developed and produced in ISO 9001 and ISO 14001 certified factory.

| | **WT65EBIDG 504173** |
|---|---|
| **TECHNICAL DATA** | |
| Water supply | |
| temperature - °C | 50 |
| hardness - °f | 7-14 |
| Drain pump | ● |
| Rinse Booster Pump | ● |
| N° of cycles | 4 |
| Duration cycles - sec. | 55/65/120/inf |
| Dishes capacity/h | 1180 |
| Basket capacity/h | 65 |
| Door/hood thickness | Double Skin Insulated |
| External dimensions - mm | |
| width | 735 |
| depth | 815 |
| height | 1507 |
| Cell dimensions - mm | |
| width | 590 |
| depth | 560 |
| height | 409 |
| Washing cycle | |
| temperature -°C | 55-65 |
| tank capacity - lt. | 40 |
| power pump - kW | 1.5 |
| electrical elements - kW | 3 |
| Hot rinse cycle | |
| duration - sec. | 16 |
| temperature during rinse - °C | 84 |
| water consumption - lt./cycle | 3.8 |
| Boiler capacity - lt. | 12 |
| Boiler elements - kW | 10.5 |
| Rinsing | |
| water consumption lt./h | 3.8 |
| Power - kW | |
| drain pump | 0.034 |
| Rinse pump | 0.35 |
| total power | 12.1 |
| Net weight - kg. | 128 |
| **INCLUDED ACCESSORIES** | |
| BASKET FOR 18 DINNER PLATES 240MM-YELLOW | 2 |
| BASKET FOR 48 SMALL CUPS/24 CUPS-BLUE | 1 |
| BASKET FOR BULK CUTLERY-BROWN | 1 |
| **ACCESSORIES** | |
| *NOT TRANSLATED* | 864015 |
| *NOT TRANSLATED* | 864017 |
| *NOT TRANSLATED* | 864026 |
| *NOT TRANSLATED* | 864050 |
| *NOT TRANSLATED* | 922166 |
| 20 L EXTERNAL MANUAL WATER SOFTENER | 860430 |
| BASKET FOR 6 TRAYS 530X370MM-RED | 866743 |
| BRASS INLET VALVE KIT FOR UC AND HT | 864000 |
| COVER GRID FOR SMALL/LIGHT ITEMS IN RACK | 867016 |
| DETERGENT LEVEL PROBE KIT FOR UC+HT DW | 864004 |
| HACCP PRINTER KIT FOR UC, HT AND POTW | 864002 |
| INTEGRATED HACCP KIT FOR UC, HT AND POTW | 864001 |
| RINSE AID LEVEL PROBE KIT FOR UC+HT DW | 864005 |

IDB040

2007-11-19

**Electrolux Dishwashing**
**UK Hood Type WT65E**

504173

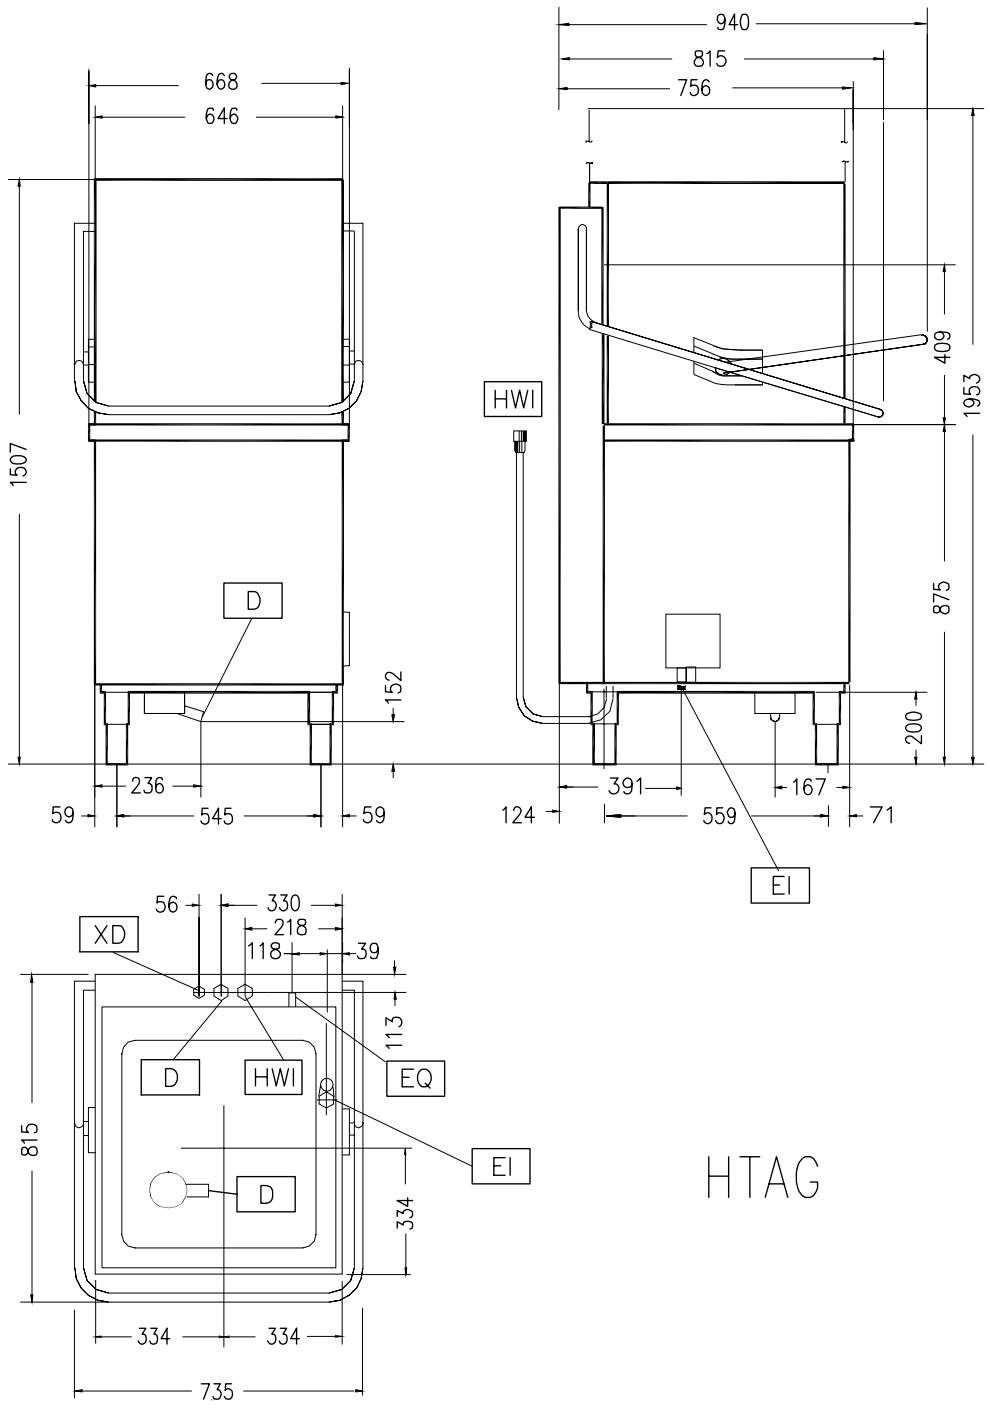


IDB040

2007-11-19

| LEGEND | WT65EBIDG<br>504173 |
|---|---|
| D - Water drain | 20 mm |
| EI - Electrical connection | 400 V, 3N, 50 |
| HWI - Hot water inlet | G 3/4" |
| XR - Connection for detergent dispenser | ● |